

---

# **blender\_addon\_utils**

***Release 0.1***

**30350n**

**May 19, 2023**



# GETTING STARTED

<b>1 Installation</b>	<b>3</b>
<b>2 How it works</b>	<b>5</b>
<b>3 Usage</b>	<b>7</b>
<b>4 register</b>	<b>9</b>
<b>5 error_helper</b>	<b>11</b>
<b>6 debug</b>	<b>13</b>
<b>Python Module Index</b>	<b>15</b>
<b>Index</b>	<b>17</b>



Welcome to the blender\_addon\_utils documentation.

This is a utility module for blender addons to help automatically installing addon dependencies and checking for updates.



---

**CHAPTER  
ONE**

---

**INSTALLATION**

Add the `blender_addon_utils` repository to your addon as a submodule:

```
$ git submodule add https://github.com/30350n/blender_addon_utils my_addon/blender_addon_utils/
```



---

## CHAPTER TWO


---

### HOW IT WORKS

You can declare required dependencies for your addon via `add_dependencies()`.

When you generate your registration code via `register_modules_factory()`, the function will automatically check if all previously declared dependencies are available.

If not, the resulting registration functions, won't register your modules, but the end-user will instead be presented with a panel like this, in the addon preferences:

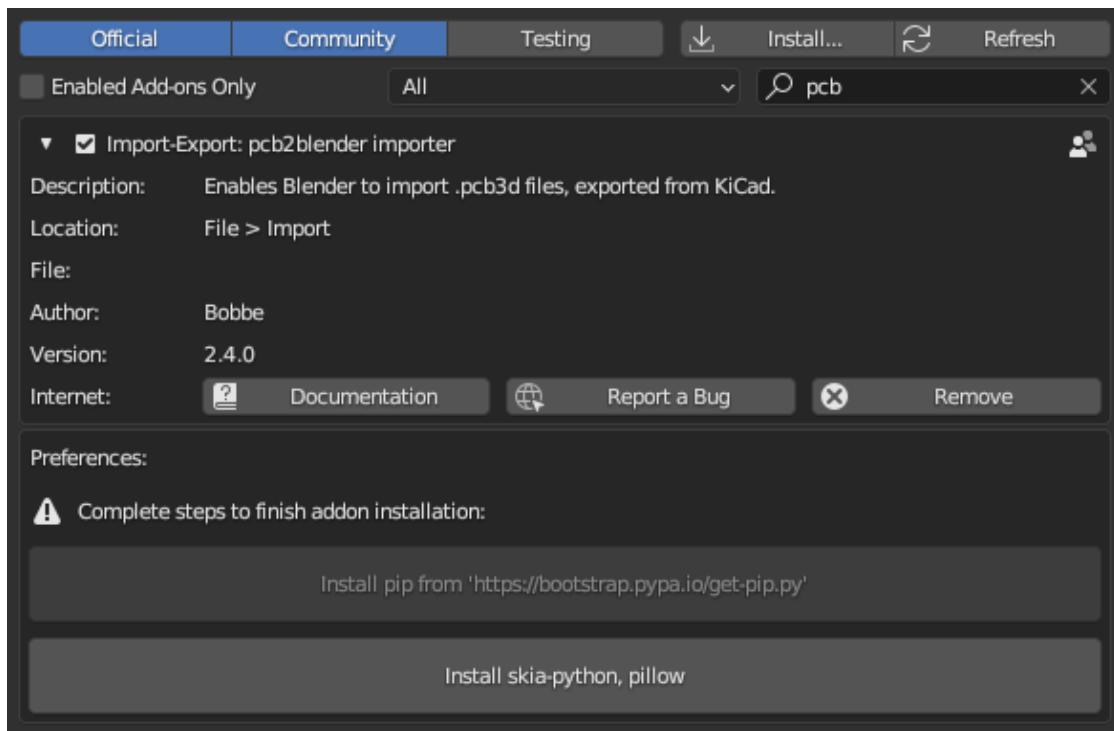

The panel first offers the option to install pip and then the required dependencies.

After dependency installation is complete, your addon will be automatically reloaded.

By default, dependencies will be installed to a `site-packages` directory inside the root directory of the package that's calling the `add_dependencies()` function.

So if you call `add_dependencies()` in `my_addon/__init__.py`, dependencies will be installed to `my_addon/site-packages` (make sure your vcs ignores this folder).

---

CHAPTER  
THREE

---

USAGE

To use the `add_dependencies()` and `register_modules_factory()` functionality, all your addon code will have to be arranged into submodules, which each submodule having its own `register()` and `unregister()` functions.

Your `__init__.py` should only contain minimal setup code, like this:

```
bl_info = {  
    ...  
}  
  
from .blender_addon_utils import add_dependencies, register_modules_factory  
  
deps = {  
    "pip_package_name": "module_name",  
}  
add_dependencies(deps)  
  
modules = ["my_submodule"]  
register, unregister = register_modules_factory(modules)
```

Example `my_submodule.py` file:

```
import bpy  
  
...  
  
classes = (  
    ...  
)  
  
def register():  
    for cls in classes:  
        bpy.utils.register_class(cls)  
  
def unregister():  
    for cls in reversed(classes):  
        bpy.utils.unregister_class(cls)
```



---

CHAPTER  
FOUR

---

REGISTER

**register\_modules\_factory**(*modules*: *Iterable[str]*) → *Tuple[Callable, Callable]*

Register addon submodules and handle dependency installation (if dependencies were added via *add\_dependencies()*).

**Parameters**

**deps** (*list*) – List of module file names to register. Each file has to define its own *register()* and *unregister()* functions.

**Returns**

*register()* and *unregister()* function

**add\_dependencies**(*deps*: *dict*, *path*: *Path* | *None* = *None*, *no\_extra\_deps*: *bool* = *False*)

Add dependencies to be installed via pip during registration.

**Parameters**

- **deps** (*dict*) – Pairs of pip package and module names (can be the same)
- **path** (*pathlib.Path*) – Directory to install the dependencies to (defaults to *calling\_package\_root/site\_packages*)
- **no\_extra\_deps** (*bool*) – Ignore any sub-dependencies required (pip –no-deps option)

*Example*



## ERROR\_HELPER

### class ErrorHelper

Mixin class for operators to simplify error/warning handling.

#### error(*msg: AnyStr*) → *set*

Report and print error message.

##### Parameters

*msg (str)* – The error message

##### Returns

{"CANCELLED"}

#### warning(*msg: AnyStr*)

Report and print warning.

##### Parameters

*msg (str)* – The warning message

Example:

```
class MY_ADDON_OT_my_operator(bpy.types.Operator, ErrorHelper):
    bl_idname = "my_addon.my_operator"
    bl_label = "My Operator"

    def execute(self, context):
        if context.mode == "EDIT_MESH":
            self.warning("we are in edit mode")
        elif context.mode == "POSE":
            return self.error("operator doesn't work in pose mode")
        return {"FINISHED"}
```



---

CHAPTER  
SIX

---

DEBUG

```
class Timer(name: AnyStr | None = None)
```

Context manager for timing code snippets.

**Parameters**

**name** (*str*) – if specified, print it together with the elapsed time when exiting the context

**Variables**

**time** (*float*) – elapsed time (only available after exiting the context)

Example:

```
>>> with Timer("100000 divisions"):
...     result = [i / 42 for i in range(100000)]
...
4112.60 us [100000 divisions]
```



## PYTHON MODULE INDEX

d

debug, 13

r

register, 9



# INDEX

## A

`add_dependencies()` (*in module register*), 9

## D

`debug`  
    `module`, 13

## E

`error()` (*ErrorHelper method*), 11  
`ErrorHelper` (*class in error\_helper*), 11

## M

`module`  
    `debug`, 13  
    `register`, 9

## R

`register`  
    `module`, 9  
`register_modules_factory()` (*in module register*), 9

## T

`Timer` (*class in debug*), 13

## W

`warning()` (*ErrorHelper method*), 11